
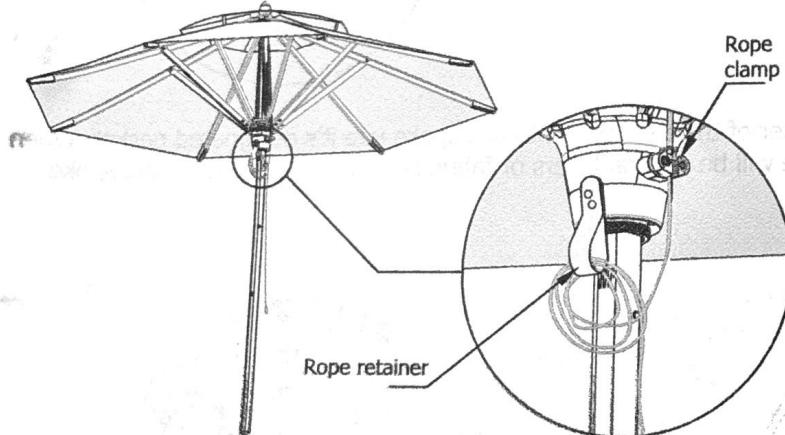


TO OPEN THE UMBRELLA

Before opening the umbrella, gently pull apart and separate the spokes into their natural open position. Then grab one of the spokes, followed by pulling down on the rope until the umbrella is fully open.

Grab the spoke nearest to the end of the rope, then pull it towards you while pulling down on the rope until the umbrella canopy is fully opened.

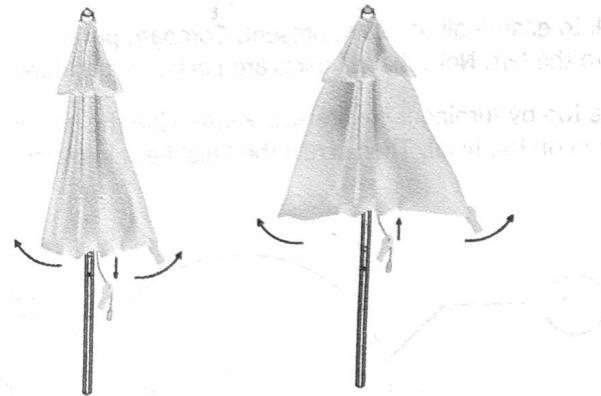


Once the umbrella is fully opened, lock the rope by pressing it into the rope clamp. up the loose rope, then place it in the leather rope retainer.

TO CLOSE THE UMBRELLA


Hold the rope firmly and pull out the rope from the rope clamp. Turn the ring below the hub till the cam lines up with the pin in the pole. Then release the rope slowly until the umbrella is fully closed.



Rotate the knob left to the right till the cam lines up with the pin on the pole.

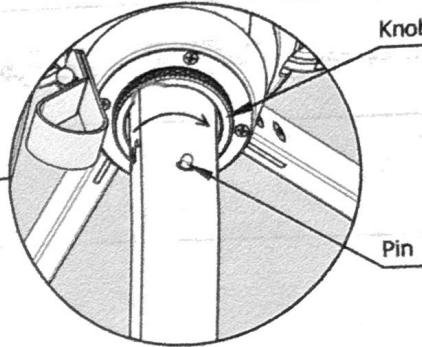

Use the straps to rescue the umbrella canopy. For added protection, fit the umbrella with an optional protective cover.

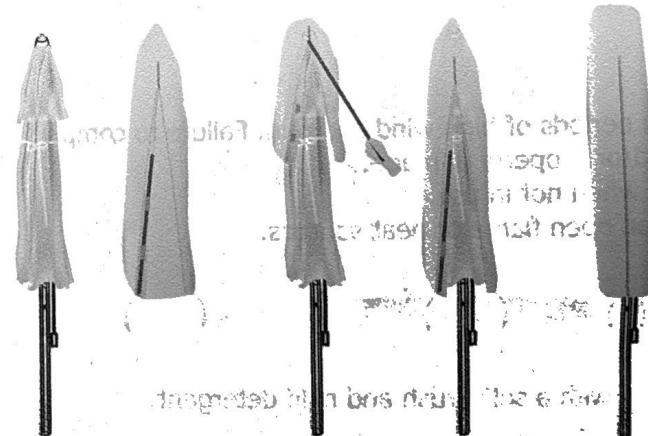

Use the included aluminium rod to fit and remove the umbrella cover. The aluminium rod can be stores in a designated pocket inside the umbrella cover.

WT ROUND TEAK UMBRELLA (Ø250cm/Ø8') & (Ø3m/10')

ASSEMBLY INSTRUCTIONS AND USER MANUAL

| Package Contents :

Picture	Description	Qty
	Frame assembly (Top Finial included)	1
	Umbrella canopy	1
	Cover (Optional)	1
	Aluminium Pole (Optional)	1

| Cautions :

1. Do not use this umbrella during periods of high wind and rain. Failure to comply may result in personal injury and/or property damage.
2. Always take the umbrella down when not in use.
3. Do not expose the umbrella to an open flame or heat sources.

| Care Instructions :


1. Simply clean the umbrella canopy with a soft brush and mild detergent.
2. Do not machine wash.
3. Do not iron.
4. Air dry the canopy thoroughly before storing for extended periods.
5. When air drying the canopy, ensure it is completely open.

| Setup & Operating Instructions

ASSEMBLING THE UMBRELLA

Before commencing assembly, check to ensure all parts are present. Compare parts supplied with package contents list to the left. Note that all parts are packed separately.

1. Unscrew the finial on the umbrella top by turning it counter-clockwise. Line the hole in the canopy fabric up with the tenon on the finial. Then screw the finial back in place.

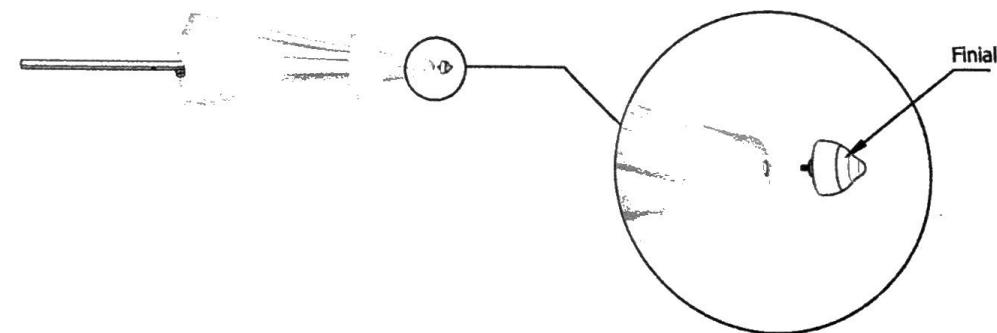

2. Gentle pull each corner of the canopy to fit each spoke into its designated pocket. When fitted correctly, there will be several layers of fabric both on top and below the spoke.

